

# Ergo-Press

Pneumatic bead breaker table




## SPECIFICATIONS

- The linear movement of its ram gives perfect control over the process.
- The new mobile table with lateral, axial, and rotational movement allows an easy wheel positioning.
- This table is self-locking when breaking a tyre bead.
- Its DQN hydraulic shock absorber guarantees a smooth bead breaking. For runflat, low profile and all other passenger car, motorcycle and van wheels.
- Standard colour: red RAL 3020

## TECHNICAL INFORMATION

MAX. TYRE WIDTH	36 cm
RIM WIDTH	2" - 13"
AIR PRESSURE	8 - 15 bar
LENGTH	93/113 cm
WIDTH	83 cm
HEIGHT	148 cm
WEIGHT	96 kg

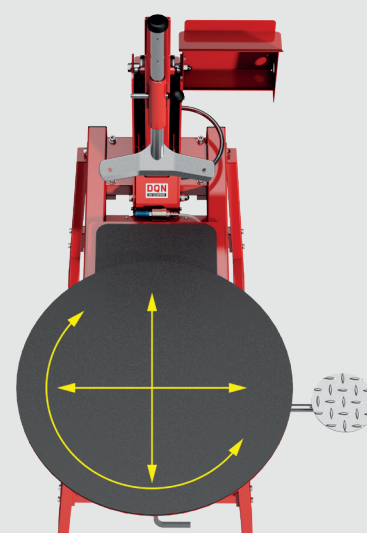

📍 Neerveld 9 - 2550 Kontich - België

☎ +32 3 201 51 10 ✉ [info@dqn.be](mailto:info@dqn.be) 🌐 [www.dqn.be](http://www.dqn.be)





The "Ergo-Press" is the core component of the Ergo-Line. This pneumatic bead breaker table brings comfort, efficiency and safety.

The linear movement of the Ergo-Press has many advantages: the full force created by the cylinder is applied directly to the ram, making it the most powerful bead breaker on the market. It helps to better control the process and avoids contact between the rim and the ram.

The automatic locking system of the mobile table is activated as soon as there is contact between the ram and the tyre, thereby preventing any rim movement during the bead breaking.


The unique hydraulic shock absorber (DQN patent) ensures a smooth and safe bead breaking.

The ram shovel is specifically designed to work with tyres with rim edge protectors, runflat tyres and standard tyres.

The column is equipped with a hoop to hold a bucket of mounting paste and a storage area to keep useful small tools accessible.

#### OPTIONS AND ACCESSORIES

- RAL colour on demand
- Customized adaptations
- Second lateral turning plate

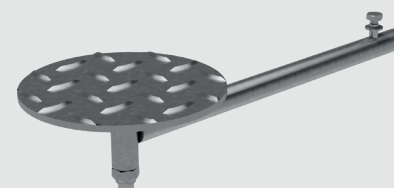

EP P

Free!  
Choose your  
RAL colour

